

DS1100

Ultra Compact Cost-effective
Laser Scanner

DATALOGIC™



Unattended Scanning Systems

General Description

Datalogic's **DS1100** offers the best cost-effective industrial solution for OEM applications.

Specifically designed for easy integration into OEM equipment, the **DS1100** provides very compact dimensions, light weight and, obviously, Datalogic's recognized excellent scanning performance.

Many applications and customers' needs have been analyzed and taken into great consideration during the **DS1100** product development. Thanks to these studies, direct and 90° output window versions have the same compact dimensions, allowing very flexible installation. The motor can be switched off and on via software commands, in accordance with application needs, increasing product life and silence during use. Set-up procedures are very easy to follow so the scanner can be quickly configured through WINHOST™, the intuitive set-up software.

The **DS1100** covers a wide reading area, scans very close to the output window and grants optimized performance on high resolution codes, thanks to a full range of specific models.

The perfect combination of a powerful RISC decoder with reliable decoding algorithms and impressive optical performance assure the highest read rate and accuracy even on damaged or poorly printed bar codes.

Integration and connection with existing control systems, PCs or PLCs, is very easy using the two high speed serial interfaces. Multi-point scanning configurations are available using Master-Slave or Multiplexer connections.

The **DS1100** is equipped with IP65 rugged industrial housing and is also available as an embedded module for specific applications.

Features

- > **Scanning speed of 500 scans/s**
- > **Motor on/off software commands**
- > Cost-effective
- > Very compact dimensions for both direct/90° reading window models
- > Wide reading width at a short reading distance
- > Lightweight <100 g (<3.53 oz)
- > Dual high speed serial interface (RS232/RS485)

Applications

- > Chemical and blood analyzers
- > Pharmaceutical code verifiers
- > Automatic teller machines (ATMs)
- > Printing machines
- > Video rental machines
- > Film processing machines
- > Assembly lines
- > Work-in-process & Quality control

Specifications

ELECTRICAL CHARACTERISTICS

POWER SUPPLY 5 VDC \pm 5% (4 to 30 VDC with converter)

POWER CONSUMPTION 1.5 W

MECHANICAL CHARACTERISTICS

WEIGHT (without cable) <100 g (<3.53 oz)

CASE MATERIAL Magnesium (body) + Polycarbonate (cover)

PERFORMANCE

LIGHT SOURCE Visible laser diode (650 nm)

SCANNING SPEED 500 scans/s

MAX. RESOLUTION

1xxx models 0.20 mm (8 mils)

2xxx models 0.12 mm (5 mils)

MAX. READING DISTANCE

1xxx models 220 mm (8.7 in) on 0.50 mm (20 mils) code res.

2xxx models 110 mm (4.3 in) on 0.30 mm (12 mils) code res.

MAX. DEPTH OF FIELD

1xxx models 190 mm (7.5 in) on 0.50 mm (20 mils) code res.

2xxx models 100 mm (3.7 in) on 0.30 mm (12 mils) code res.

APERTURE ANGLE

70 degrees

RASTER APERTURE

15 mm (0.6 in) at 220 mm (8.7 in)

READABLE CODES

Code 2/5, Code 39, Code 93, Code 128, EAN/UPC, EAN 128, Codabar, Plessey, Pharmacode

MULTILABEL READING

Up to 6 different codes in the same reading phase

COMM. INTERFACES

RS232+RS485 half duplex

BAUD RATE

Up to 115,200 bauds

INPUT SIGNALS

One programmable digital input and One External Trigger digital input

OUTPUT SIGNALS

Two programmable digital outputs

PROGRAMMING METHOD

Via serial port (WINHOST™)

OPERATING MODES

'On line', 'Serial On-line', 'Automatic', 'Test'

MOTOR CONTROL

Motor on/off software commands

LED INDICATORS

'Power On', 'Ext Trigger', 'Laser On', 'Good Read', 'Tx Data'

LASER CLASSIFICATION

IEC 825-1 Class 2; CDRH Class II

LASER CONTROL

Security system to turn laser off in case of motor slow down or failure

ENVIRONMENT

OPERATING TEMPERATURE 0 to 45 °C (32 to 113 °F)

STORAGE TEMPERATURE -20 to 70 °C (-4 to 158 °F)

HUMIDITY

90% non condensing

VIBRATION RESISTANCE

IEC 68-2-6 test FC 1.5 mm; 10 to 55 Hz; 2 hours on each axis


SHOCK RESISTANCE

IEC 68-2-27 test EA 30 G; 11 ms; 3 shocks on each axis


PROTECTION CLASS

IP65


Dimensions

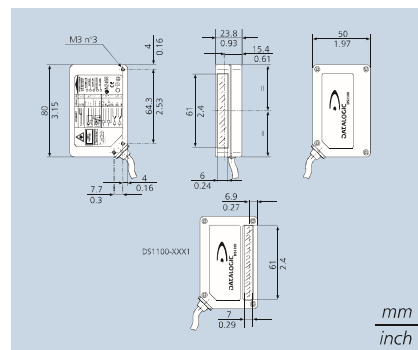

Reading Diagrams

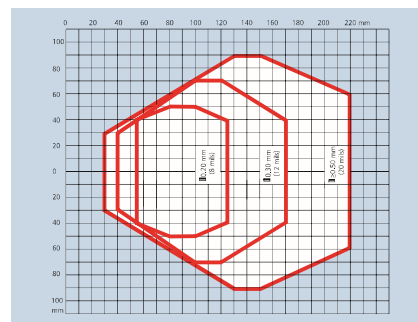

Standard resolution models

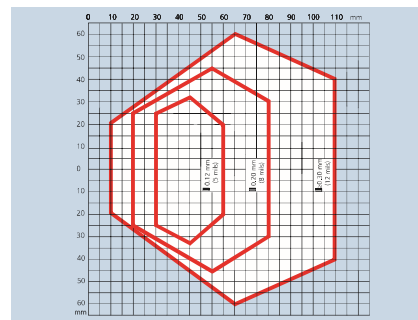

High resolution models

